



Figure 6. High resolution camera, 600 mm lens and panoramic head facing upstream wall of a dam

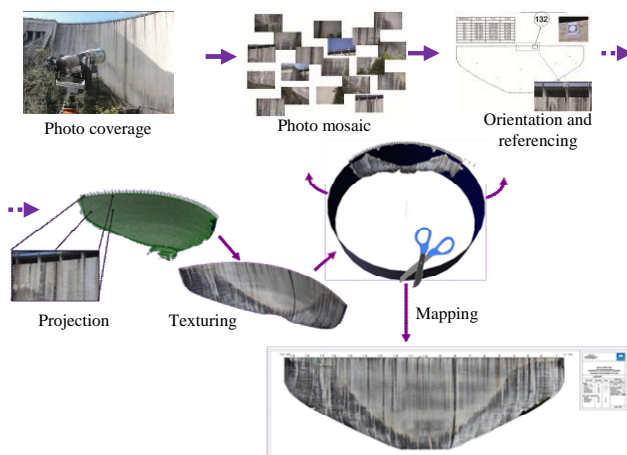


Figure 7. Block diagram of orthophotography operations

5. OPERATIONS

The SCANSITES 3D[®] monitoring requires that all data is known in a single XYZ referential. The method can use the one established for the traditional survey (targets, pillars, geodetic points). In case there is no available network, it is necessary to create one, based on singular points on the structure and referenced with traditional survey operations or laser scanning (LIDAR).

Regarding the visual inspection, each structure owner has its own requirements. It deals with defects, which have to be surveyed, and the associated classification. One of the most important parameters is the minimum opening for a crack that needs to be surveyed. It mainly impacts the focal length used during the inspection (up to 4000 millimetres) and the total number of defects stored. All those considerations help in preparing the mission, mainly the database and the inspection software.

The LIDAR, the SCANSITES[®] and/or the photogrammetric head are set at different locations in order to cover the structure's entire surface. The high gain video camera and quality lenses of the SCANSITES[®] allow it to work with low ambient luminosity. The LIDAR, for its part, can work without light.

With the LIDAR, a complete scan is realized. Based on this point cloud, a triangular meshing "Figure 8" is generated and converted in a 3D shape. The first use of this 3D shape is to allow the SCANSITES[®] to locate the defects in 3D and/or to project the photos in order to create the very high resolution orthophotography.

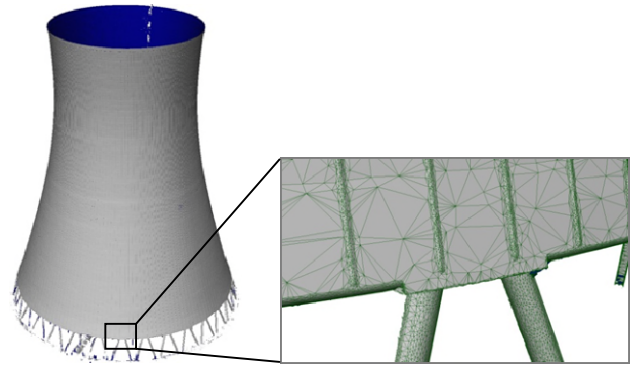


Figure 8. Triangular meshing

With this incoming data, the visual inspection is processed. With the SCANSITES[®], the operator inspects the entire wall by moving the inspection head with a joystick. When a defect is found, it is photographed. The 3D map is updated in real time with defects and the database is filled with its characteristics and coordinates. In parallel or in replacement of this operation, a complete high definition photogrammetric coverage is done with a high resolution camera and a robotised panoramic head. The operations done to inspect the orthophotography use the same software than the real time SCANSITES[®] tool but this inspection is realized at the office.

6. TREATMENTS

The treatments aim to produce, on a multilayer file, a map containing all defects captured, the geometric deflections and the photogrammetric coverage.

The first step is to compare the structure's 3D shape to the theoretical shape or to a previous survey. The 3D deflections are extracted and a map is generated. "Figures 10, 12" Two ways of representation are possible. One is a coloured map: each colour depends on the deflection value. The other way is to carry out a contour line representation.

The second step is to overlay the defects surveyed with the SCANSITES[®] or orthophotography, using the same referential network.

The last step is to overlay the pictures directly on the structure's 3D shape enabling the production of an orthophotography. With these files, many views can be generated such as composite views: defects/deflections, defects/pictures, or thematic views (based on database queries).

6.1 Case study: a concrete arch dam in France

The SCANSITES3D[®] method was applied to a large dam located in France. Its main figures are a height of 95 meters and a crest length of 200 meters. The average distance between the points of view and the downstream facing was about 100 meters. The aim of this job was to connect the geometric deflections to the defects surveyed. The LIDAR survey recorded 70 million points, and the defects' total quantity was near 4000. "Figures 9, 10"

The focal lens of photogrammetric coverage has been adjusted between 100 and 500 mm in order to produce an orthophotography of 1.5 billion pixels with a pixel size of 5 mm. The detailed inspection was performed by the SCANSITES[®] tool with a focal length of 1000 mm.

The defects and photogrammetric coverage have been mapped using a cylindrical projection based on the mean cylinder of the downstream wall.

This monitoring was helpful to locate the parts to repair and to store the visual and geometric aspect of the wall.

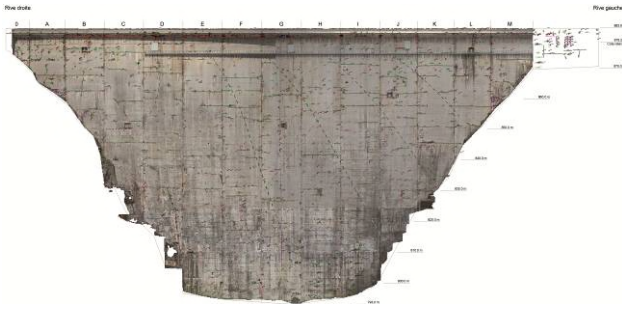


Figure 9. Orthophotography of the downstream wall with defects overlaid

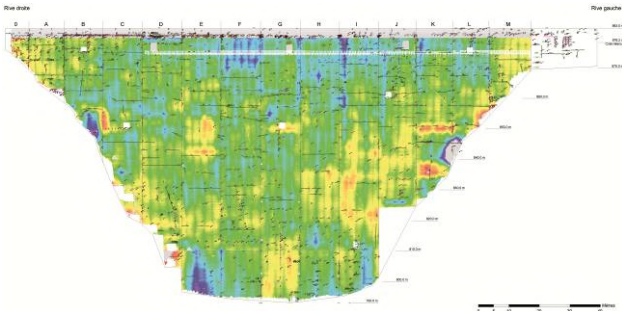


Figure 10. Map overlaying deflection/defects and magnifying

6.2 Case study: a concrete cooling tower in France

The second case study concerns a cooling tower located in Europe. Its dimensions are a height of 90 meters and a diameter of 50 meters at the bottom.

The aim of the job was to get the tower's geometric deflection and an accurate visual inspection with a global photogrammetric coverage "Figures 11 and 12".

As carried out on the previous case study (dam), a LIDAR point cloud was generated representing 150 million points. In parallel, we covered the whole shell with high resolution pictures, projected it on a 3D shape, and then on a projection cone, for a total quantity exceeding 25 billion pixels.

In order to generate the orthophotography, several processors and computers were used in order to reduce the projection time. Without the parallel computing, the treatment time would be more than two weeks.

On this type of structure, mostly built in the 70's and 80's, we've observed that the real shape can be far from the theoretical shape.

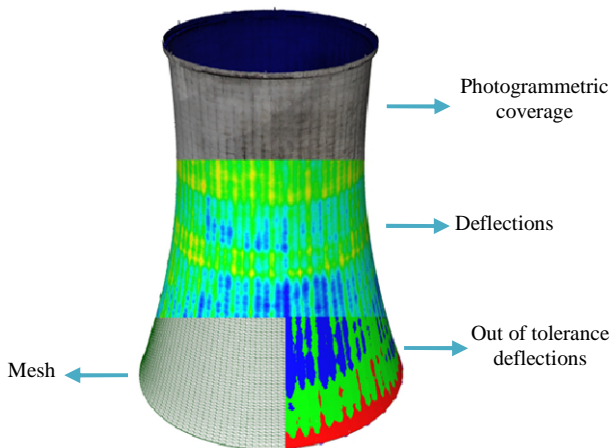


Figure 11. Representation of 3D model, deflections and photogrammetric coverage

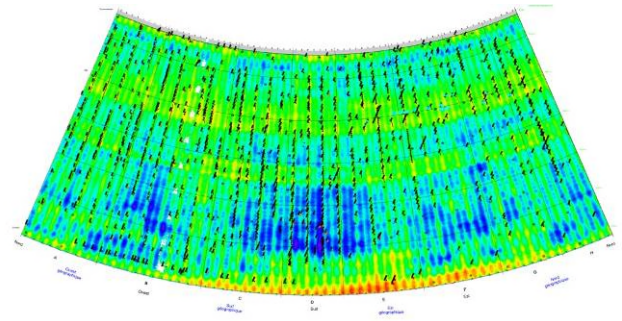


Figure 12. Map overlaying deflection/defects and magnifying

7. RESULTS

7.1 Statistics

Concerning the visual inspection, the traditional way is to produce a sketch based on a close inspection (rope access) or binocular observations. The consequent difficulties of these methods are to get a good location of the defects and their evolution. SCANSITES3D® provides some digital results: a scaled defect map and defects database. The first result is to produce an accurate report emphasizing defects evolution between two inspections, and the number of defects divided by zone "Figure 13".

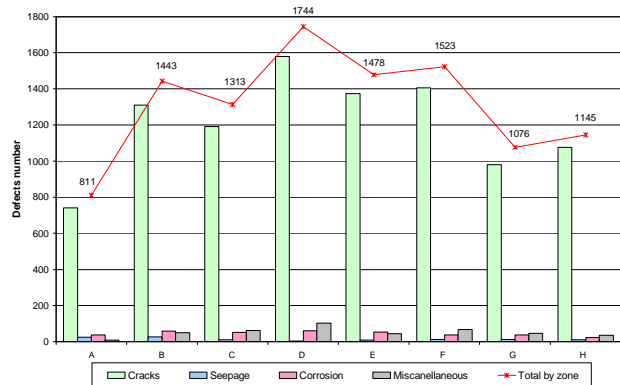


Figure 13. Number of defects by family and zone

The LIDAR coverage is a guideline for defects analysis, for instance to see if cracks are correlated, or not, with geometrical distortions.

Another interesting point is its use on parts covered by moss. Scanning one way we get structural information where visual inspection is inefficient. It is also helpful to know where a structural diagnosis has to focus on (with concrete sample or testing core for example).

7.2 Use of the data for repairing and utility of geometry

The data extracted from the visual inspection is useful to establish an accurate bill of quantities for restoration works, like total crack length to be treated, total corroded bar amount for passivation treatment...

Providing the exact length and the exact position of cracks and corrosions allows the preparation of a reparation intervention with all the necessary information: quantity of product to use, localisation (height from the floor or the crest,...) and simulations for the access (length of rope and inclination, height of positive or negative crane, ...)

As the accurate 3D shape of the structure is known, data for planning sensor installation or well location can be easily computed.

7.3 Advantage of LIDAR compared to traditional survey

Traditional geometric survey uses theodolites and well-known micro-triangulation methods. It has the advantage of providing results close to the best possible accuracy (1 to 10 mm). However, the drawback is that it is a “discrete” method, since it focuses on a limited number of points, usually a few dozen (target, reflectors), not necessarily placed on critical parts. Even if SCANSITES3D® is less accurate, the high density scan produces some surface definitions close to a 3-4 mm uncertainty, and we get global continuous information. It greatly improves the sensitivity of the geometric diagnosis, showing all the details.

In addition, the geometrical surveys with LIDAR were much quicker to carry out than the traditional geodesic method. Another advantage is that this method works on every structure, even if there is no surveying equipment such as targets.

7.4 GIS (Geographic Information System) consultation

All the data (photo, geometric survey, defects maps and evolutions) is overlaid on a same file. The engineer gets a faster way to make his diagnosis compared to the fastidious data fusion imposed by separate reports.

The last advantage is the storage of all collected data in a database, offering efficient tools to measure the structure’s ageing

All these jobs are performed without rope access, improving dramatically the safety conditions.

8. EXTENSION TO TUNNEL AUSCULTATION

A version of the SCANSITES3D® has been adapted for tunnel auscultation. The tools are about the same: short range laser scanner, digital camera with wide lens, thermographic camera and odometer mounted on a trolley. The data is mapped on a mean cylinder representing tens of kilometers of tunnel wall enabling direct access to the visual aspect, distortions linked and position in the tunnel (kilometer point – KP).

The view rendered and referenced is useful to detect leaks, concretions and parts of the concrete ready to fall. “Figures 14, 15 and 16”.

The resulting file size can reach tens of billions of pixels, depending on the length of the tunnel... Each part of the tunnel can be viewed with a computer: visual aspect, geometry. This helps the owner for repairation and new equipment installation as the maintenance access is very restricted to a few hours during the night or weekend for high traffic tunnels.

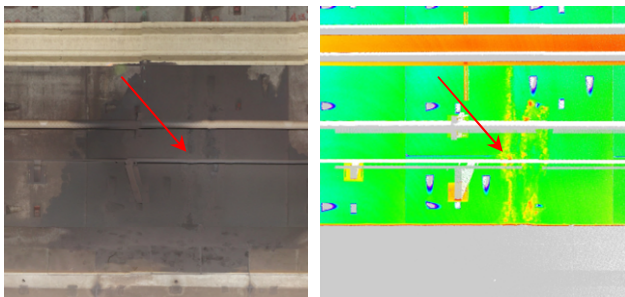


Figure 14. Water leakage and concretions (left : orthophoto – Right : distortion map)

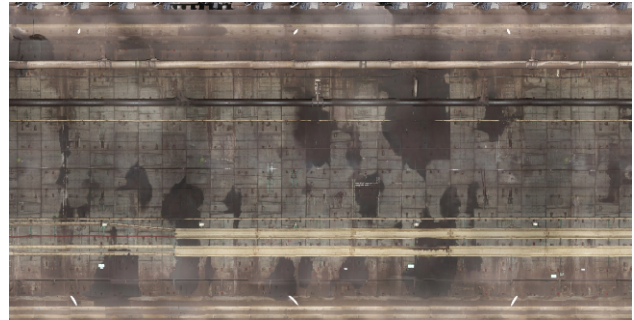


Figure 15. Orthophotography of Tunnel (cylindrical projection)

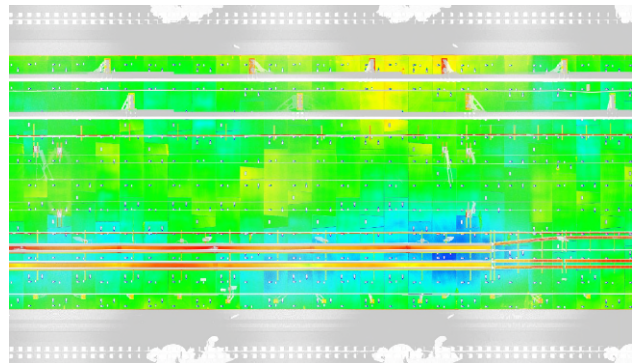


Figure 16. Distortions of Tunnel (cylindrical projection)

9. CONCLUSION

We’ve presented a new and modern approach for visual inspection and geometric survey, here focused on dams and cooling towers, with SCANSITES3D®. This method is particularly convenient for every structure which needs the resuming of its monitoring program, because it provides an exhaustive inventory. It also allows the readjustment of an existing monitoring program by completing the partial survey done by conventional approaches. Not only is this method adapted to concrete structures, but it can also be used on old constructions, masonry-works, clay works... Finally, the correlation between defects and deflections is precious information used to locate the areas where geodic surveying and sensors have to focus on. Moreover, besides useful results for the monitoring, the SCANSITES3D® provides as-existing mappings which are often lacking on old structures. This method is widely applicable on large structures such as dams, but also skyscrapers, chimneys, cooling towers, pillars of viaducts, tunnels, ...

The next step, in progress, is to overlay a high accuracy thermographic imagery survey. Its aim is to study the possible gain in diagnosis, mainly on cracks.